


▶ INTUWORX ASA12 ◀

MOBILE DEVICE CONNECTION BAY & RACKLIGHT

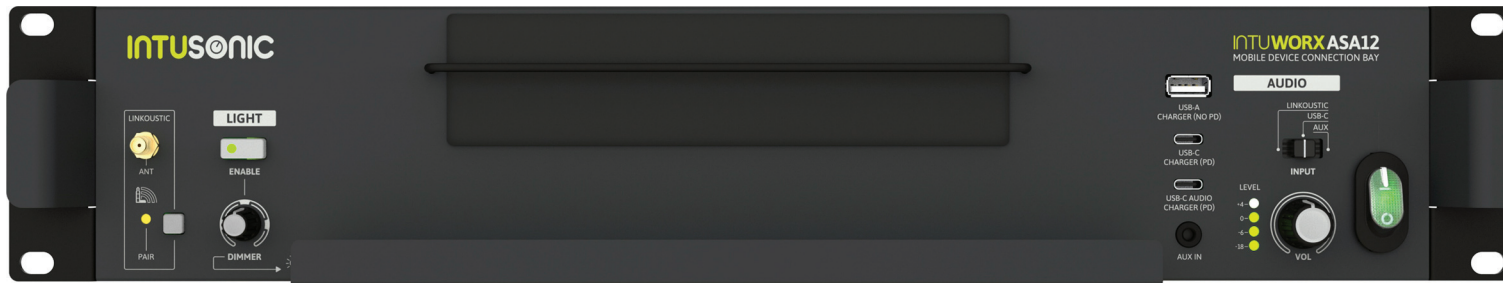

CONCEPT

The INTUWORX™ ASA12 is a new, innovative approach to media replay in installed sound systems and allows for the first time to properly place, retain and connect a mobile device to an installation. It likewise caters for all possible scenarios of connectivity, leaving the choice of a wireless LINKOUSTIK™ interface, a cabled 3.5mm TRS connection, but also sporting an internal USB-C audio interface* for devices not offering any other connectivity and/or where wireless exposure is unwanted. The ASA12 turns any of these source connections into a proper, line-level balanced audio signal with adjustable output level. Being charged while being used as a replay source, any mobile device thus becomes for the first time an integral component of a sound system. Adding to these new-class-defining features, a dimmable down-facing racklight allows illumination of other system components while leaving the mobile device in a darker environment for better visibility.

FEATURES

- ▶ 19" rack-mountable holder and connection bay for mobile devices with integrated racklight
- ▶ Sufficient space for 6.3" devices in 2U configuration
- ▶ 2U extension panel for devices up to 10" (included)
- ▶ Safe retention of connected device by elastic holder strip
- ▶ 3 alternative connection methods: 3.5mm TRS wired, USB-C digital audio*, LINKOUSTIK™ 5.0
- ▶ 5V/2A USB-A charger port with PD (power delivery) feature**
- ▶ Front-panel output level control with 4-LED VU meter

- ▶ Rear panel output connections available as balanced 3.5mm terminal strip, balanced XLR and unbalanced RCA
- ▶ Rear-panel maximum level control
- ▶ Built-in LED strip, downfacing, daylight white, with dimmer and on/off switch
- ▶ Internal PSU with AC mains voltage selector 115/230V
- ▶ Full metal case with separately detachable rack ears and handles

*USB-C audio interface compatibility is subject to mobile device.

**PD (Power Delivery) charging ability is subject to mobile device

TECHNICAL DATA

Frequency response.....	20Hz – 20 kHz
LINKOUSTIK™ SN-Ratio / THD.....	> 100dB, 0.2%
USB-C Audio SN-Ratio / THD.....	> 93dB, 0.03%
3.5mm TRS SN-Ratio / THD.....	> 110dB, 0.001%
Max. Output level.....	23.5dBu (1% THD)
Light Source	19x 3528LED@20mA=1.14W white
AC IN	115V/230– 50/60Hz, max 26W
Dimensions WxDxH (main unit)...	482.6x207x88mm
Weight / +2U Extension.....	3.3 / 3.65 kg

LOGISTICS DATA

Order Number.....	2024701
Single unit EAN-13.....	5060502923578
Single Carton size WxDxH.....	535x330x122 mm
Single Carton gross weight.....	4.3 kg
Units per master carton.....	3
Master carton size.....	WxDxH 555x395x360mm
Master carton gross weight.....	13.7 kg

